

TWINPLUS MODULE SERIES

HIGH EFFICIENCY MONO-PERC M4-9B-R

445-465W



OUTSTANDING PRODUCT PERFORMANCE


- Competitive high-temperature performance with ameliorated temperature coefficient
- Minimized power loss in cell connection
- Better performance under shading effect
- Decreased nominal operating cell temperature to $45 \pm 2^{\circ}\text{C}$
- Higher power generation with multi-busbar and half-cut technology

TRUSTWORTHY QUALITY AND RELIABILITY

- Guaranteed 0~+5W positive tolerance secures reliable power output
- 5400Pa maximum snow load, 2400Pa maximum wind load
- Optimized electrical design lowers hot spot risk and operating current

PID RESISTANT

- Industry-leading cell processing technology and electrical design ensure solid PID resistance

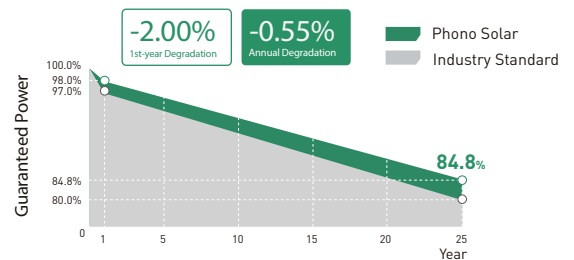

12-year Product Warranty | 25-year Linear Performance Warranty

MANAGEMENT SYSTEM CERTIFICATES

IEC 61215, IEC 61730

ISO 9001:2015 / Quality management system

ISO 14001:2015 / Standards for environmental management system

ISO 45001:2018 / International standards for occupational health & safety



Bloomberg Tier¹
NEW ENERGY FINANCE



ELECTRICAL TYPICAL VALUES

Model	1000V	PS445M4-24/TH		PS450M4-24/TH		PS455M4-24/TH		PS460M4-24/TH		PS465M4-24/TH		
	1500V	PS445M4H-24/TH		PS450M4H-24/TH		PS455M4H-24/TH		PS460M4H-24/TH		PS465M4H-24/TH		
Testing Condition	STC		NOCT		STC		NOCT		STC		NOCT	
Rated Power (P _{mp})	445		331		450		335		460		342	
Rated Current (I _{mp})	10.80		8.73		10.87		8.78		10.94		8.84	
Rated Voltage (V _{mp})	41.21		37.94		41.40		38.12		41.60		38.30	
Short Circuit Current (I _{sc})	11.29		9.12		11.38		9.20		11.47		9.27	
Open Circuit Voltage (V _{oc})	49.11		46.36		49.24		46.48		49.37		46.61	
Module Efficiency (%)	20.39		20.61		20.84		21.07		21.30			

STC(Standard Testing Conditions):Irradiance 1000W/m², AM 1.5, Cell Temperature 25°C

NOCT (Nominal Operation Cell Temperature): Irradiance 800W/m², Ambient Temperature 20°C, Spectra at AM1.5, Wind at 1m/s

MECHANICAL CHARACTERISTICS

Cell Type	Monocrystalline 166mm x 83mm
Dimension (L×W×H)	Length: 2101mm (82.72 inch)
	Width: 1039mm (40.91 inch)
	Height: 35mm (1.38 inch)
Weight	24.0kg (52.91 lbs)
Front Glass	3.2mm Toughened Glass
Frame	Anodized Aluminium Alloy
Cable (Including Connector)	4mm ² (IEC), (+):450mm,(-):250mm or Customized Length
Junction Box	IP 68 Rated

TEMPERATURE RATINGS

Voltage Temperature Coefficient	-0.28%/°C
Current Temperature Coefficient	+0.05%/°C
Power Temperature Coefficient	-0.35%/°C
Tolerance	0~+5w
NOCT	45±2°C




ABSOLUTE MAXIMUM RATING

Operating Temperature	From -40 to +85°C
Hail Diameter @ 80km/h	Up to 25mm
Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Maximum Series Fuse Rating	20A
PV Module Classification	II
Fire Rating (IEC 61730)	C
Maximum System Voltage	DC 1500V/1000V

PACKING CONFIGURATION

Container	20' GP	40' HQ
Pieces/Container	255	682

ELECTRICAL CHARACTERISTICS

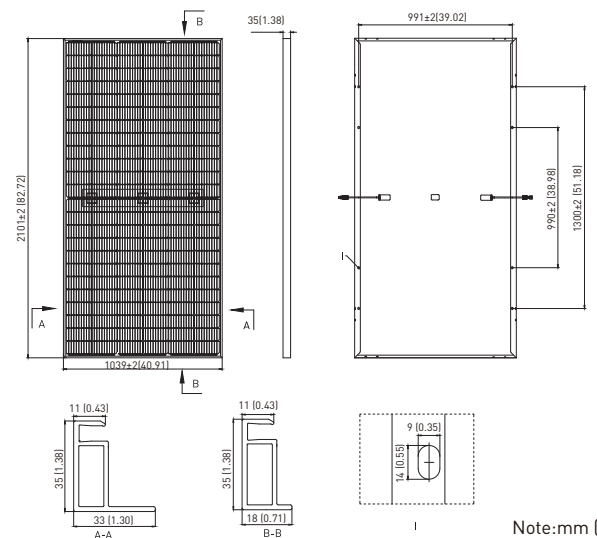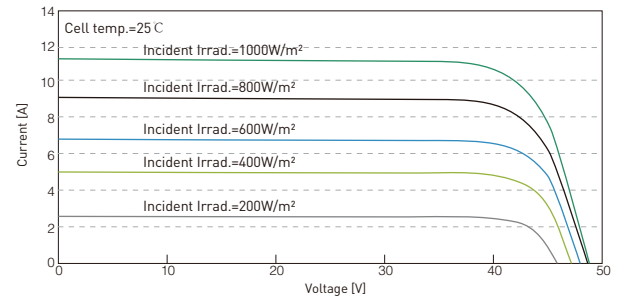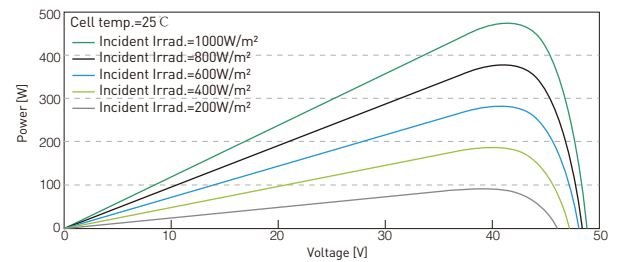

Note:mm (inch)